


# DOWNFORCE – Sports Front Lip Spoiler

## USER'S GUIDE

This manual is for installing the DF Sports Front Lip Spoiler. This instruction and many other more are available for download online at <http://www.downforce.biz/manual/>

- There are several WARNING sections in the installation. Always read and follow the instruction to prevent injuries, accidents, and possible damage to the vehicle.

This Downforce Sport Front Lip Spoiler was designed for the DF Sport Front Bumper, however the OEM 2002+ Front Bumper will work this lip also.

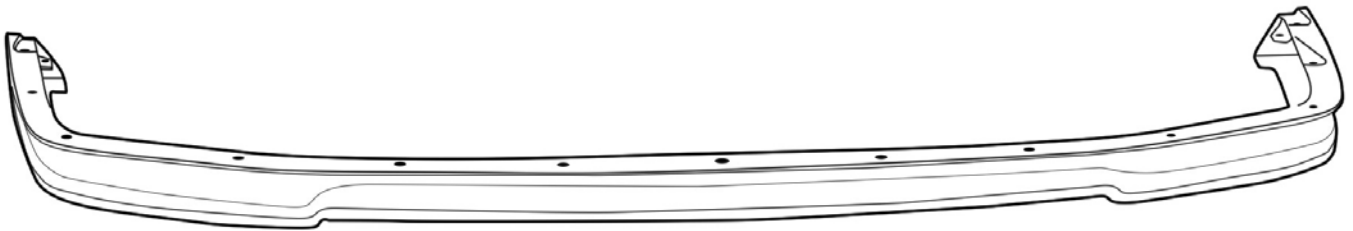

## Requirements

The DF Sport Front Lip Spoiler G2 is only available to use on any NSX that has the DF NA2 Conversion utilizing the DF Sport Front Bumper or 2002+ OEM Front Bumpers. Any NSX from 2002 – 2005 can use this spoiler as well. The mounting holes on your bumper must be intact for the front lip to securely install onto the bumper.

## 1 Getting Started



Before you begin, check to see if you have enough clearance to access the 10mm bolts that are currently holding the factory front spoiler. If lifting the car is required, as a safety precaution we recommend that you work on a flat surface so your NSX is not leaning forward or back. Always use a jack stand to keep the car tilted or as a back up incase of a car jack failure.

## 2 Tools and Equipments Needed



10 mm Ratchet

## 3 OEM Front Spoiler Removal

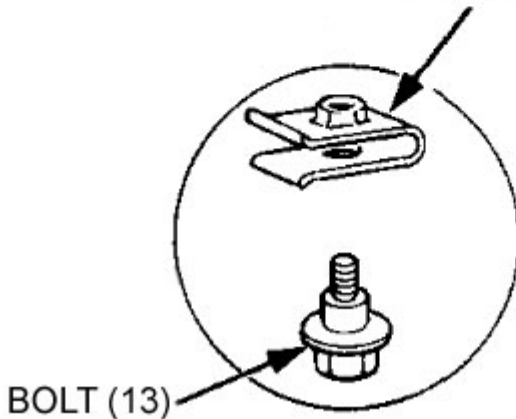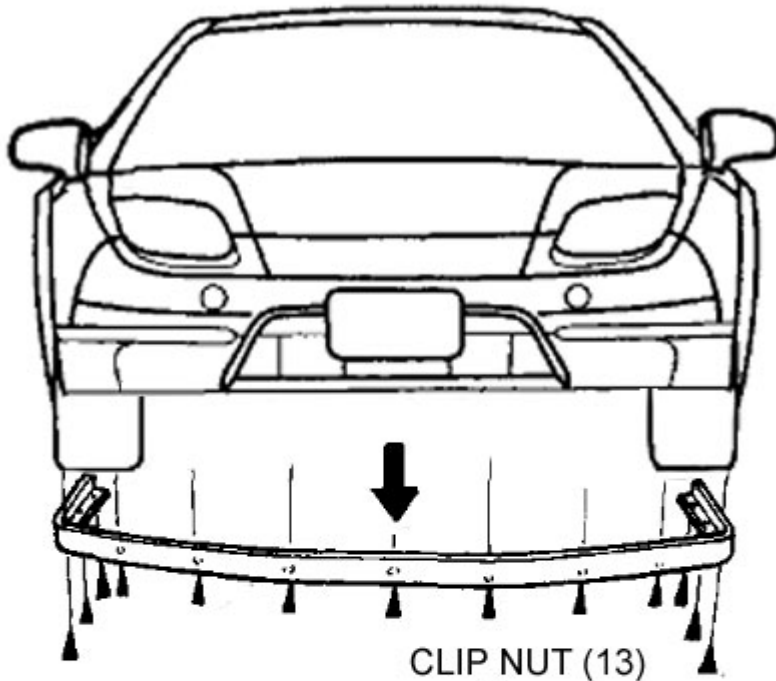


Step 1: Remove all 13 bolts using a ratchet with a 10mm hex socket.

Step 2: Remove the front lip and slide out all of the clip nuts from the lip, as you will be reusing them to install the DF Sports Front Lip.

# 4

## DF Sport Front Lip Install

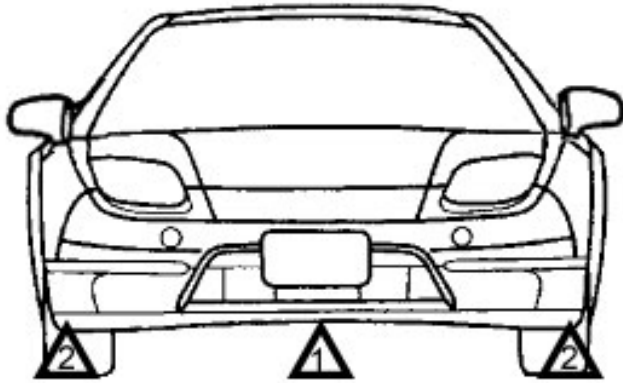

- Step 1: Slide the Clip Nuts onto all of the correct positions on the lip. Some trimming or cutting may be required.
- Step 2: Start mounting the Sports Lip on the center section first. Do not tighten until the very end.
- Step 3: Then mount both ends next. Do not tighten until the very end.
- Step 4: Mount the remaining bolts and check for placement / position. If you are happy then go ahead and tighten all of the bolts. Do not over-tighten the bolts as it may damage the Sport Front Lip.