

DOWNFORCE – NSX ENGINE COVER

INSTALLATION AND USER'S INSTRUCTIONS


Thank you for purchasing the Engine Cover from Downforce.

Before beginning any removal or installation, please take time to thoroughly read through the instructions. This instruction is available for download online at <http://www.downforce.biz/manuals/>

- There are several WARNING sections in the installation. Always read and follow the instruction to prevent injuries, accidents, and possible damage to the vehicle.
- Do not modify the Engine Cover.
- Do not install the Engine Cover in any way other than described in the following instructions.
- If you have any questions about the use of the Engine Cover, ask Downforce about any concerns.
- Downforce and its dealers are not responsible for injuries, accidents, and damage to persons and property that arise from the use of this product.
- This product is for off road use only.

PART NAME	REAR ENGINE COVER
PART NUMBER	DF-50025
VEHICLE	ACURA NSX 1991-2005

1 Requirements

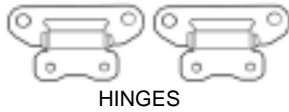

NSX

The following parts need to be reused only from coupe engine covers from the figure on the left side. You will also need to reuse the factory 10mm bolts that were originally attached to the brackets. If you are missing any of the following parts you can purchase them from any authorized Acura dealer or from Downforce.

NSX-T

You will need the following parts available from your local Acura dealer or from Downforce. The NSX-T hardware is not compatible for this engine cover. The weather strip is both interchangeable and have the same part number.

Part Number	Description	Retail Price
69210-SL0-000	HINGE (2)	\$33.09
74845-SL0-000	STAY	\$41.09
69112-SL0-000	BRACKET, STAY	\$7.68
91604-SD2-013	GROMMET, HOOD STAY	\$0.35

2 Tools and Equipments




3 Factory Engine Cover Removal



- 1.) Open the rear glass hatch
- 2.) Make sure the glass hatch struts can hold up the weight, if not make sure it is secure.
- 3.) Remove the (4) 10mm bolts as shown in the picture
- 4.) NSX-T: You have to unplug a 2 pin connector.
- 5.) Remove the engine cover.

4

Engine Cover Setup

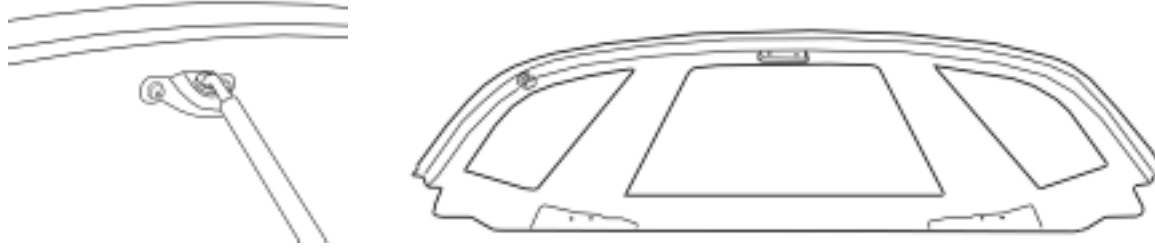

- 1.) Remove the Bracket that holds the Stay on the original engine cover (Non Targa Models only)
- 2.) Do not reuse the factory screw that holds the bracket, your DF cover includes special short 10mm bolt.
- 3.) Transplant the old engine cover gasket to the new cover (Targa and Non Targa)

5

Engine Cover Installation

- 1.) Prop the STAY so the engine cover stays up.
- 2.) Now align and reuse the (4) factory 10mm bolts that hold the cover to the hinges.

6

Engine Cover Information

General

The engine cover is designed for enhancing the cosmetic value of the NSX. The weight of the engine cover is also reduced.

DF Cover Weight: 8.2 lbs
OEM Weight: 12.8 lbs

Clearcoat

The engine cover comes with automotive clearcoat paint to protect the engine cover from light scratches; polishing and buffing can fix scratches. Additional clear coats can be applied over the existing clear.

Lexan Windows

Available in 4 shades which includes: Clear, Light Tint, Dark Tint, Brown
Complete Set \$75.00
Center Window \$40.00
Left Window \$17.50
Right Window \$17.50

Adhesives

We have several adhesives available.
Black Foam
Mylar Low Profile
Mylar Dots

Vinyl Borders

The borders on top of the lexan windows are available separately.
Complete \$20.00
Center Window \$10.00
Left Window \$5.00
Right Window \$5.00